

VDM® Powder X

VDM® Powder X

VDM® Powder X is the powder variant of a nickel-chromium-molybdenum-iron alloy with cobalt and tungsten additions.

VDM® Powder X is characterized by:

- Spherical particles
- High purity
- Low oxygen content
- Excellent oxidation resistance up to 1,200 °C (2,190 °F)
- High-temperature strength
- Good resistance to stress corrosion cracking

Designations and standards (based on VDM® Alloy X)

Standard	Material designation
EN	2.4665 – NiCr22Fe18Mo
ISO	NiCr21Fe18Mo9
UNS	N06002
AFNOR	NC22FeD

Table 1 – Designations and standards

Chemical composition

Ni	Cr	Fe	Mo	Co	W
47	22	18.5	9	1.5	0.6

Table 2 – Chemical composition (%)

VDM® Powder X contains low amounts of oxygen of up to 0.03%.

Physical properties

Density	Melting range
8.3 g/cm ³ at 20 °C	1.260 – 1.355 °C
0.3 lb/in ³ at 68 °F	2,300 – 2,470 °F

Microstructural properties

VDM® Powder X has a face-centered cubic structure.

Corrosion resistance

The corrosion resistance depends on the processing and heat treatment of the material. The conventionally produced VDM® Alloy X usually shows excellent oxidation resistance up to 1,200 °C (2,190 °F) and can be used in neutral as well as in reducing atmospheres. VDM® Alloy X is resistant in carburizing and nitriding atmospheres.

Applications

Due to its corrosion resistance in various atmospheres up to very high temperatures, and excellent high-temperature strength, VDM® Powder X finds wide application in high-temperature services.

Typical applications include:

- Components for industrial and aircraft gas turbines (combustion chambers, honeycombs, housings etc.)
- Industrial furnace parts, support rolls, grids, wire belts and radiant tubes
- Pigtails in petrochemical furnaces
- High-temperature gas cooled nuclear reactors


Availability

According to the AM process requirements of our customers, VDM® Powder X is available in a wide range of particle fractions from 10 to 250 µm.

Standard particle fractions

Particle size distribution µm	Oxygen content %	Porosity < 10µ (pore area) %
10-53	< 0,03	< 0,5
53-150		

Additional particle fractions are available on request. Please contact us.

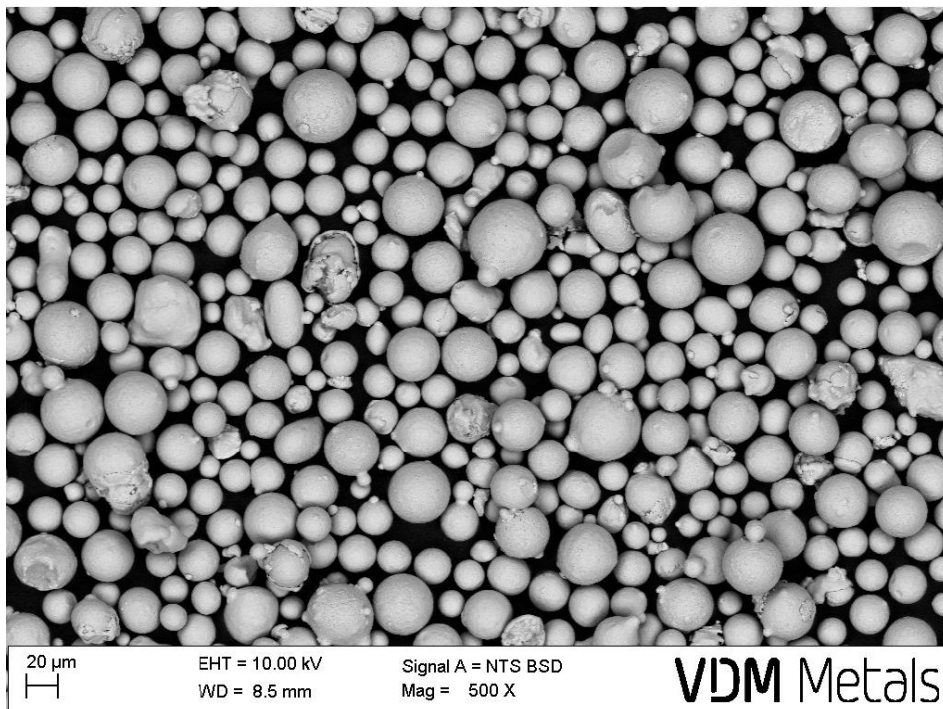

The picture shows a typical micrograph of VDM® Powder X as an example.

Legal notice

January 25, 2019

Publisher

VDM Metals International GmbH
Plettenberger Straße 2
58791 Werdohl
Germany

Disclaimer

All information contained in this data sheet is based on the results of research and development work carried out by VDM Metals International GmbH and the data contained in the specifications and standards listed available at the time of printing. The information does not represent a guarantee of specific properties. VDM Metals reserves the right to change information without notice. All information contained in this data sheet is compiled to the best of our knowledge and is provided without liability. Deliveries and services are subject exclusively to the relevant contractual conditions and the General Terms and Conditions issued by VDM Metals. Use of the most up-to-date version of this data sheet is the responsibility of the customer.

VDM Metals International GmbH
Plettenberger Straße 2
58791 Werdohl
Germany

Phone +49 (0)2392 55 0
Fax +49 (0)2392 55 22 17

powder.vdm@vdm-metals.com
www.vdm-metals.com